



StrongPipe HDPE range

FLOAT YOUR PIPE

StrongPipe HDPE

Our top quality European produced HDPE dredging pipes can be delivered with or without stubends and steel flanges. In combination with our StrongFloats it's the best solution for dredging and sand winning applications.

Available in:

- All regular qualities
- Pressure levels PN3,2 up to PN25
- Various diameters
- All lengths, up to 20 metres

HDPE Welding Stubends:

- All regular qualities
- Pressure levels PN 3,2 up to PN 25
- Various diameters

Flanges


All our steel and PE (steel core) flanges are available in PN16 or PN10 dimensions.

We supply our steel flanges galvanized or coated in any color you demand.

We have also have PE flanges with a steel core.

HDPE Bends and Y-Pieces

We deliver HDPE bends and Y-Pieces for discharge pipes, available in any size, wall thicknesses, diameters and angles.

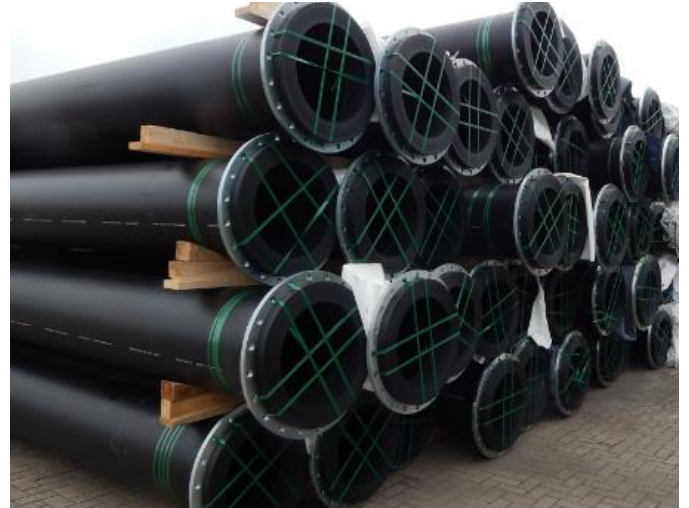

StrongPipe HDPE Range

Some examples / Main dimensions

StrongPipe HDPE 100 most used sizes								
OD	SDR 11 PN16		SDR13,6 PN12,5		SDR17 PN10		SDR21 PN8	
	ID	Wall	ID	Wall	ID	Wall	ID	Wall
160	130,9	14,5	136,5	11,8	141,2	9,4	144,8	7,6
180	147,3	16,4	153,5	13,2	158,8	10,6	162,9	8,6
200	163,6	18,2	170,6	14,7	176,5	11,8	181,0	9,5
225	184,1	20,5	191,9	16,5	198,5	13,2	203,6	10,7
250	204,5	22,7	213,2	18,4	220,6	14,7	226,2	11,9
280	229,1	25,5	238,8	20,6	247,1	16,5	253,3	13,3
315	257,7	28,6	268,7	23,2	277,9	18,5	285,0	15,0
355	290,5	32,3	302,8	26,1	313,2	20,9	321,2	16,9
400	327,3	36,4	341,2	29,4	352,9	23,5	361,9	19,0
450	368,2	40,9	383,8	33,1	397,1	26,5	407,1	21,4
500	409,1	45,5	426,5	36,8	441,2	29,4	452,4	23,8
560	458,2	50,9	477,6	41,2	494,1	32,9	506,7	26,7
630	515,5	57,3	537,4	46,3	555,9	37,1	570,0	30,0
710	580,9	64,5	605,6	52,2	626,5	41,8	642,4	33,8
800	654,5	72,7	682,4	58,8	705,9	47,1	723,8	38,1
900	736,4	81,8	767,6	66,2	794,1	52,9	814,3	42,9
1000	818,2	90,9	852,9	73,5	882,4	58,8	904,8	47,6
1100	900,0	100,0	938,2	80,9	970,6	64,7	995,2	52,4
1200	981,8	109,1	1023,5	88,2	1058,8	70,6	1085,7	57,1

RELATED DREDGINGCASE PRODUCTS:



StrongHose



StrongFloats



StrongPU



StrongPipe Steel



Nijverheidsstraat 1a
NL-4283 GW GIESSEN
The Netherlands

Phone : +31 (0)6 46 05 09 80
Web : www.dredgingcase.nl
E-Mail : info@dredgingcase.nl

All our quotations, all orders placed with us and all contracts concluded with us, are subject to the METAALUNIE CONDITIONS, as they read according to the text printed on the back. These conditions are filed with the registrar of the District Court of Rotterdam. Upon request, the conditions of delivery and payment will be sent to you for free as well.